

fallstop®

safety equipment for work at heights



Fallstop Division



The Tractel Group has been innovating products and services within the material handling, building maintenance, suspended access and fall protection industries for over 50 years. With distribution, sale outlets and manufacturing facilities throughout the world, Tractel represents one of the true leaders in providing solutions for working and establishing safety at heights.



Tractel's Fallstop Division was established in the 1990's to continue the evolution of the company with the philosophy to manufacture the highest quality products, to the heights standards within the fall arrest industry. With a manufacturing facility in Montreal, Canada, along with numerous warehouse locations, our goal is to provide the finest service to our customers throughout North, South and Central America.



Throughout the pages of this catalog, you will find innovative products to match the needs for virtually every work and rescue application. These products are all tested and approved by an "independent" third party testing facility with the guarantee of the Tractel name behind it. Whether through research and development, testing or training, our dedicated team of employees strive to build, maintain and support every product with years of experience so that you can rely and depend on us.



Tractel is a proud member of these associations:



TABLE OF CONTENTS

Harnesses

Versafit	4
Versafit Ladder	5
Versafit Scaffold	5
Versafit with Frontal Attachment	5
Versafit Reflective	5
Ultra-Light	6
Construction	6
Kevlar	7
X-Style	7
Derrick	8
Tower	8
Promast	9
Proclimb	9

Accessories

Tracvest	10
Shoulder Pads	10
Extended D-Ring	10
Harness Storage Bag	10
Flexible Lifeline Counterweight	10

Belts

Tool Belt	10
Back Pad	10
Padded	10

Lanyards

Tracpac Lightweight Web	11
Tracpac High-Abrasion Web	11-12
Tracpac Extendible	13
Tracpac 1/2-in. Rope	13
Tracpac Shock Absorber	13
Stretchfor	14
Extendfor	14
Tracpac Kevlar Webbing	15
Tracpac Wire Rope	15
High-Abrasion Web Lanyard	15
Rope Lanyard	16
Work Positioning Assemblies	16

Connectors

Connectors for Lanyards	17
-----------------------------------	----

Soft Anchorage Connectors

Anchor Sling	18
Sling Choker	18
Anchorage Connectors	18
Wire Rope Sling	18
Anchor Strap	18
Endless Sling	18

Hard Anchorage Connectors

Beam Clamp	19
Beam Trolley	19
BeamSlide	19
Anchorage Connector	19
Anchorage D-ring	19
Splice-Safe	19
Ringsafe	19
EZE-Hook	19

Rope Grabs

Stopfor® Rope Grab	20-21
Gripgrab® Rope Grab	21
Wire Rope Grab	21

Lifelines

Polyblend Lifeline	21
Superline Lifeline	21
Kernmantle Lifeline	21

Self-Retracting Lifelines

Blocfor® Self-Retracting Lifelines	22
10 ft. (3 m) Self-Retracting Web Lanyard with Cover	22

Load Arrestors

Blocmat Load Arrestors	23
----------------------------------	----

Fall Protection Kits

Aerial Lift Kit	24
Basic Fall Protection Kit	24
Scaffolding/Forming Kit	24
100% Tie Off Kit	24
Rebar Kit	24
Welder's Kits	24
Quick Donning Vest Kit	24

Roofers Kits

Quik-Mount®	25
Reusable Roofing Anchor	25
Heavy-Duty Hinged D-ring Roof Anchor	25

Confined Space/Rescue

Ascent/Descent System	26
Derope Systems	26

Tower Climber's Systems

Basic System	27
Deluxe System	27

Accessories

Bags	27
Victim Transfer Pulley	27
Rescue Cradle	27
Suspension Loop	27

Confined Space Systems

Standard Systems	28
Tracpode Rescue Systems	28
Motorized Systems	28
Standard Tripod	29
Tracpode Rescue Tripod	29
Steel Head Pulley	29
Leg Mounting Bracket	29
Work Winch	29
Blocfor® Bi-Directional Retrieval Lifeline	29
Spreader Bar	29
Bosun's Chair	29
Carrying Bag for Tripod	29

Temporary Horizontal Lifelines

Tirsafe™	30
Fallprotec	31
Travsafes® Tempo	31

Permanent Horizontal Lifeline System

Travsafes™	32-33
Travflex®	32-33

Ladder Safety System

Standard	34
Extended	34

Tieback Anchors

U-Bar	34
Wall Mounted	34

Appendixes

Part Number/Page Number	35
Contact Information	36

FEATURES

- Single back D-ring
- ◊ Adjustable sub-pelvic strap
- ◊ Seven-point adjustment
- Retaining spring adjuster buckle
- Adjustable back D-ring
- Adjustable chest strap
- ◊ Lanyard retaining clips on both shoulder straps
- ◊ Fall indicators / inspection tag / serial number
- Accommodates tool belt up to four inches wide

◊ *Exclusive feature*

SIZES

- Small, one size, X-large and XX-large

TONGUE & BUCKLE



BACK VIEW



QUICK CONNECT

AC732 (shown)



AC742



- Side positioning D-rings

AC7315



- Orange and black
- High visibility

AC7122



- Side D-rings
- Frontal attachment

AC752



- Shoulder retrieval D-rings

AC772



- Side positioning D-rings
- Shoulder retrieval D-rings

TONGUE & BUCKLE

AD732



AD742 (shown)



- Side positioning D-rings

AD7315



- Orange and black
- High visibility

AD7122



- Side D-rings
- Frontal attachment

AD752



- Shoulder retrieval D-rings

AD772



- Side positioning D-rings
- Shoulder retrieval D-rings

QUICK CONNECT



Suspension/Descent
CSA Group D



Fall Arrest
CSA Group A



Ladder Climbing
CSA Group L



Positioning
CSA Group P



Restraint



Retrieval
CSA Group E

NEW!



LADDER

AC722 (shown)



- Quick Connect legs
- Back D-ring
- Upper sternum D-ring
- Fixed chest strap

AD722



- Tongue & Buckle legs
- Back D-ring
- Upper sternum D-ring
- Fixed chest strap

NEW!



SCAFFOLD

AC732/D (shown)



- Quick Connect legs
- Back D-ring
- ♦ Integrated shoulder pads
- Fixed chest strap

AD732/D



- Tongue & Buckle legs
- Back D-ring
- ♦ Integrated shoulder pads
- Fixed chest strap

♦ *Exclusive feature*

NEW!



FRONTAL ATTACHMENT

AC762 (shown)



- Quick Connect legs
- Back D-ring
- Frontal attachment

AD762



- Tongue & Buckle legs
- Back D-ring
- Frontal attachment



REFLECTIVE

AC3316 (shown)



- Quick Connect legs
- Back D-ring
- 3M Reflective bands

AD3316



- Tongue & Buckle legs
- Back D-ring
- 3M Reflective bands



Suspension/Descent
CSA Group D



Fall Arrest
CSA Group A



Ladder Climbing
CSA Group L



Positioning
CSA Group P



Restraint



Retrieval
CSA Group E

ULTRA-LIGHT

FEATURES

- Integrated sub-pelvic strap
- Five-point adjustment
- Adjustable back D-ring
- Adjustable chest strap
- Accommodates tool belt up to four inches wide
- ◇ Fall indicators / inspection tag / serial number

◇ *Exclusive feature*

SIZES

- Small, one size and X-large



AC032 (shown)



- Quick Connect legs

AD032



- Tongue & Buckle legs

AC042



- Quick Connect legs
- Side positioning D-rings

AD042



- Tongue & Buckle legs
- Side positioning D-rings

CONSTRUCTION

FEATURES

- ◇ Adjustable sub-pelvic strap
- ◇ Seven-point adjustment
- Retaining spring adjuster buckle
- Adjustable back D-ring
- Adjustable chest strap
- ◇ Lanyard retaining clips on both shoulder straps
- Integrated shoulder pads
- ◇ Fall indicators / inspection tag / serial number
- Padded back support
- Removable tool belt accommodates pouches

◇ *Exclusive feature*

SIZES

- Small, medium, large, X-large and XX-large



EBB93L



- Tongue & Buckle legs
- Tool belt

EBB95L (shown)



- Tongue & Buckle legs
- Tool belt
- Side positioning D-rings



FEATURES

- ◆ Impact reduction fold
- Five-point adjustment
- Adjustable back D-ring
- Adjustable chest strap
- Accommodates tool belt up to four inches wide
- Fire retardant material
- ◆ Fall indicators / inspection tag / serial number

◆ *Exclusive feature*

SIZES

- Small, one size and X-large

NEW!



ACK03



- Quick Connect legs

ACK04 (shown)



- Quick Connect legs
- Side positioning D-rings

FEATURES

- ◆ Adjustable sub-pelvic strap
- ◆ Six-point adjustment
- Adjustable back D-ring
- Adjustable front D-ring (ladder / descent capability)
- ◆ Fall indicator tabs / inspection tag / serial number
- Accommodates tool belts up to four inches wide

◆ *Exclusive feature*

SIZES

- Small, one size and X-large



AC532



- Quick Connect legs

AD532



- Tongue & Buckle legs

AC542



- Quick Connect legs
- Side positioning D-rings

AD542 (shown)



- Tongue & Buckle legs
- Side positioning D-rings



Suspension/Descent
CSA Group D



Fall Arrest
CSA Group A



Ladder Climbing
CSA Group L



Positioning
CSA Group P



Restraint



Retrieval
CSA Group E

DERRICK

FEATURES

- Tongue & Buckle legs
- ◊ Adjustable sub-pelvic strap
- ◊ Seven-point adjustment
- Back restraint D-ring
- Adjustable chest strap
- ◊ Lanyard retaining clips on both shoulder straps
- ◊ Fall indicators / inspection tag / serial number
- Wide back support with rear attachment
- Abdominal support
- Incorporates saddle
- ◊ *Exclusive feature*

SIZES

- Small, medium, large, X-large and XX-large




BACK VIEW

EHBO2RL



- 2-ft. shock absorber

EHBF02RL (shown)



- 2-ft. shock absorber
- Frontal attachment

TOWER

FEATURES

- ◊ Adjustable sub-pelvic strap
- ◊ Seven-point adjustment
- ◊ Auto-buckle chest strap assembly
- Fixed chest strap with sternum D-ring
- Retaining spring adjuster buckle
- Padded back support with side D-rings
- Removable tool belt accommodates pouches
- Padded leg straps
- ◊ Lanyard retaining clips on both shoulder straps
- ◊ Lanyard arm positioning system
- ◊ *Exclusive feature*

SIZES

- Small, medium, large, X-large and XX-large

NEW!



BACK VIEW

FBBL (shown)



- Tongue & Buckle legs

XSAD1

- Rigid saddle for harness
- Detachable



Saddle



PROMAST

IMPROVED DESIGN

FEATURES

- ◇ Step in leg design
- ◇ Auto-buckle chest and leg straps
- ◇ Pull-down adjuster buckles
- ◇ Sternum and waist D-rings attachment
- Padded back support with side D-rings
- Removable tool belt accommodates pouches
- Integrated shoulder pads
- Padded leg straps
- Side tool loops
- ◇ Lanyard retaining clips on both shoulders
- ◇ Lanyard arm retaining system

◇ *Exclusive feature*

SIZES

- Small, medium, large, X-large and XX-large



BACK VIEW

AC100L (shown)



- Promast harness

AC1050L



- Shoulder retrieval D-rings

XSAD1

- Rigid saddle for harness
- Detachable



Saddle

PROCLIMB

IMPROVED DESIGN

FEATURES

- ◇ Step in leg design
- ◇ Auto-buckle leg straps
- ◇ Pull-down adjuster buckles
- Waist D-ring attachment
- Padded back support with side D-rings
- Removable tool belt accommodates pouches
- Integrated shoulder pads
- Padded leg straps
- Side tool loops
- ◇ Lanyard retaining clips on both shoulders
- ◇ Lanyard arm retaining system

◇ *Exclusive feature*

SIZES

- Small, medium, large, X-large and XX-large



BACK VIEW

AC132L (shown)



- Proclimb harness

XSAD1

- Rigid saddle for harness
- Detachable



Saddle



Suspension/Descent
CSA Group D



Fall Arrest
CSA Group A



Ladder Climbing
CSA Group L



Positioning
CSA Group P



Restraint



Retrieval
CSA Group E

ACCESSORIES



Tracvest

XVEST02

- Lightweight mesh outer
- Breathable inner liner snaps apart to accommodate harness
- Reflective stripping front and back
- Side storage pockets
- Lanyard retaining clip
- D-ring extender keeper
- Washable
- Sizes: one size and x-large



Shoulder Pads

XSPAD

- Compatible with all Fallstop® harnesses
- Easy to install and remove



Extended D-Ring

XW2R

- Compatible with all Fallstop® harnesses
- Easy pass-through design



Harness Storage Bag

- 11 x 16 in. (28 x 40 cm)

XB1116 (shown)

- Lightweight

XB11163

- Heavy duty

Flexible Lifeline Counterweight

XCTW01 (shown)

- 1½ lbs. (0.7 kg)

XCTW02

- 3 lbs. (1.4 kg)



BELTS

SIZES

- Small, medium, large, X-large and XX-large



Tool Belt

- 1¾ in. (45 mm) wide
- Polyester webbing
- Tongue & Buckle

BD832 (shown)

- Belt only (no D-ring)

BD842

- Back restraint D-ring

BD852

- Side positioning D-rings



Back Pad

- 4 in. (102 mm) wide
- Polyester webbing
- Tongue & Buckle

BD032

- Belt only (no D-ring)

BD042

- Back restraint D-ring

BD052 (shown)

- Side positioning D-rings



Padded

- 4 in. (102 mm) wide
- Thermal formed padded back support
- Tongue & Buckle

BD932

- Belt only (no D-ring)

BD942

- Back restraint D-ring

BD952 (shown)

- Side positioning D-rings

TRACPAC LIGHTWEIGHT WEB

SHOCK-ABSORBING LANYARD

6 FT. X 1 IN. (1.8 M X 25 MM) WEB



C1106G



C1126U

C1106G

- ¾ in. (19 mm) self-locking snap hook both ends

C1106A

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 1½ in. (41 mm) self-locking snap hook at the other end

C1106U

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2¼ in. (57 mm) self-locking snap hook at the other end

C1126G

- Two arms
- ¾ in. (19 mm) self-locking snap hook all ends

C1126A

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 1½ in. (41 mm) self-locking snap hook at the other end

C1126U

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2¼ in. (57 mm) self-locking snap hooks at the other end

TRACPAC HIGH-ABRASION WEB

SHOCK-ABSORBING LANYARD

6 FT. X 1 IN. (1.8 M X 25 MM) WEB



C106G

NEW!



C106C



C106U



C106GZ



C196G

C106G

- ¾ in. (19 mm) self-locking snap hook both ends

C106C

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 5,000 lbs. (22.2 kN) all direction carabiner at the other end

C106A

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 1½ in. (41 mm) self-locking snap hook at the other end

C106U

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2¼ in. (57 mm) self-locking snap hook at the other end

C106GZ

- ¾ in. (19 mm) self-locking snap hook both ends
- Tie-back

C196G

- Adjustable
- ¾ in. (19 mm) self-locking snap hook both ends

C196GZ

- Adjustable
- ¾ in. (19 mm) self-locking snap hook both ends
- Tie-back

TRACPAC HIGH-ABRASION WEB

SHOCK-ABSORBING LANYARD

6 FT. X 1 IN. (1.8 M X 25 MM) WEB



C126G



C126C



C126U



C126GZ



C186G

C126G

- Two arms
- 3/4 in. (19 mm) self-locking snap hook all ends

C126C

- Two arms
- 3/4 in. (19 mm) self-locking snap hook at shock-pack
- 5,000 lbs. (22.2 kN) all direction carabiner at the other ends

C126A

- Two arms
- 3/4 in. (19 mm) self-locking snap hook at shock-pack
- 1 1/2 in. (41 mm) self-locking snap hook at the other end

C126U

- Two arms
- 3/4 in. (19 mm) self-locking snap hook at shock-pack
- 2 1/2 in. (57 mm) self-locking snap hooks at the other ends

C126GZ

- Two arms
- 3/4 in. (19 mm) self-locking snap hook all ends
- Tie-back

C126UZ

- Two arms
- 3/4 in. (19 mm) self-locking snap hook at shock-pack
- 2 1/2 in. (57 mm) self-locking snap hooks at the other ends
- Tie-back

C186G

- Adjustable
- Two arms
- 3/4 in. (19 mm) self-locking snap hook all ends

C186GZ

- Adjustable
- Two arms
- 3/4 in. (19 mm) self-locking snap hook all ends
- Tie-back

C186UZ

- Adjustable
- Two arms
- 3/4 in. (19 mm) self-locking snap hook at shock-pack
- 2 1/2 in. (57 mm) self-locking snap hooks at the other ends
- Tie-back

NEW!

TRACPAC EXTENDIBLE

SHOCK-ABSORBING LANYARD

4½ TO 6 FT. (1.4 TO 1.8 M) EXTENDIBLE LANYARD



C206G

C206G


- ¾ in. (19 mm) self-locking snap hook all ends

C206A

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 1½ in. (41 mm) self-locking snap hook at the other end

C206U

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2¼ in. (57 mm) self-locking snap hook at the other end

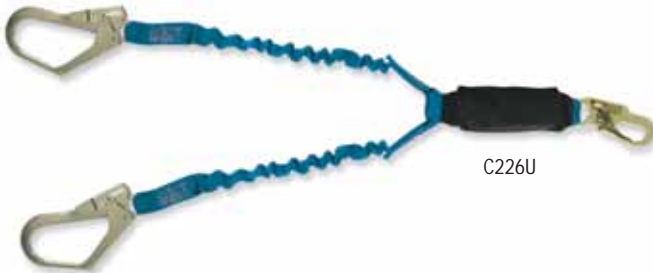

C226U

C226G

- Two arms
- ¾ in. (19 mm) self-locking snap hook all ends

C226A

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 1½ in. (41 mm) self-locking snap hook at the other end

C226U

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2¼ in. (57 mm) self-locking snap hooks at the other ends

C226PM

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2½ in. (64 mm) aluminium self-locking snap hooks at the other ends

TRACPAC 5/8-IN. ROPE

SHOCK-ABSORBING LANYARD

6 FT. X 5/8 IN. (1.8 M X 16 MM) ROPE



C806G

C806G

- ¾ in. (19 mm) self-locking snap hook all ends

C806A

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 1½ in. (41 mm) self-locking snap hook at the other end

C806U

- ¾ in. (19 mm) self-locking snap hook at shock-pack
- 2¼ in. (57 mm) self-locking snap hooks at the other ends

TRACPAC SHOCK ABSORBER



C002RG

C002RG

- 20 in. (50 cm) shock absorber
- One D-ring and one ¾ in. (19 mm) self-locking snap hook

STRETCHFOR

INTEGRAL SHOCK-ABSORBING LANYARD WITH FALL INDICATOR

WEB STRETCHABLE FROM 4½ TO 6 FT. (1.4 TO 1.8 M)



C506G

C506G

- ¾ in. (19 mm) self-locking snap hook both ends



C526U

C506A

- ¾ in. (19 mm) self-locking snap hook at shock end
- 1½ in. (41 mm) self-locking snap hook at the other end

C506U

- ¾ in. (19 mm) self-locking snap hook at shock end
- 2¼ in. (57 mm) self-locking snap hook at the other end

C526G

- Two arms
- ¾ in. (19 mm) self-locking snap hook all ends

C526A

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock end
- 1½ in. (41 mm) self-locking snap hook at the other end

C526U

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock end
- 2¼ in. (57 mm) self-locking snap hooks at the other ends

EXTENDFOR

INTEGRAL SHOCK-ABSORBING LANYARD WITH FALL INDICATOR

6 FT. (1.8 M) LANYARD



C706G

C706G

- ¾ in. (19 mm) self-locking snap hook both ends

C706A

- ¾ in. (19 mm) self-locking snap hook at shock end
- 1½ in. (41 mm) self-locking snap hook at the other end

C706U

- ¾ in. (19 mm) self-locking snap hook at shock end
- 2¼ in. (57 mm) self-locking snap hook at the other end

C726G

- Two arms
- ¾ in. (19 mm) self-locking snap hook all ends

C726A

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock end
- 1½ in. (41 mm) self-locking snap hook at the other end

C726U

- Two arms
- ¾ in. (19 mm) self-locking snap hook at shock end
- 2¼ in. (57 mm) self-locking snap hooks at the other ends



C726G

NEW!

TRACPAC KEVLAR WEBBING

SHOCK-ABSORBING LANYARD



COK6G

COK6G

- 6 ft. x 1 3/4 in. (1.8 m x 45 mm) fire retardant webbing
- Fire retardant material covered shock absorber
- 3/4 in. (19 mm) self-locking snap hook both ends

CK906G

- 6 ft. x 1/4 in. (1.8 m x 6 mm) vinyl covered wire rope lanyard
- Fire retardant material covered shock absorber
- 3/4 in. (19 mm) self-locking snap hook both ends

TRACPAC WIRE ROPE

SHOCK-ABSORBING LANYARD



C306G

C306G

- 6 ft. x 1/4 in. (1.8 m x 6 mm) vinyl covered wire rope lanyard
- Shock absorber
- 3/4 in. (19 mm) self-locking snap hook both ends

C326G

- Two arms
- 6 ft. x 1/4 in. (1.8 m x 6 mm) vinyl covered wire rope lanyard
- Shock absorber
- 3/4 in. (19 mm) self-locking snap hook all ends

C906G

- **For work positioning only**
- 6 ft. x 1/4 in. (1.8 m x 6 mm) vinyl covered wire rope lanyard
- 3/4 in. (19 mm) self-locking snap hook both ends

HIGH-ABRASION WEB LANYARD

6 FT. X 1 IN. (1.8 M X 25 MM) WEB



C606G

C606G

- 3/4 in. (19 mm) self-locking snap hook both ends

C606A

- 3/4 in. (19 mm) self-locking snap hook one end
- 1 1/2 in. (41 mm) self-locking snap hook at the other end

C606U

- 3/4 in. (19 mm) self-locking snap hook one end
- 2 1/4 in. (57 mm) self-locking snap hook at the other end

C696G

- Adjustable
- 3/4 in. (19 mm) self-locking snap hook both ends

ROPE LANYARD

6 FT. X $\frac{5}{8}$ IN. (1.8 M X 16 MM) ROPE



C406G



C496G

C406G

- $\frac{3}{4}$ in. (19 mm) self-locking snap hook both ends

C406A

- $\frac{3}{4}$ in. (19 mm) self-locking snap hook one end
- 1 $\frac{1}{2}$ in. (41 mm) self-locking snap hook at the other end

C406U

- $\frac{3}{4}$ in. (19 mm) self-locking snap hook one end
- 2 $\frac{1}{4}$ in. (57 mm) self-locking snap hook at the other end

C496G

- Adjustable
- $\frac{3}{4}$ in. (19 mm) self-locking snap hook both ends

WORK POSITIONING ASSEMBLIES



Adjustfor

Work positioning rope lanyard

CSP1560

- 6 ft. x $\frac{5}{8}$ in. (1.8 m x 16 mm) lanyard
- Quick adjustment with one hand operation and friction bend positioning
- Abrasion resistant sleeve
- Lightweight



Rebar chain assembly

V61WE

- 2 $\frac{1}{4}$ in. (57 mm) with swivel link hook
- Swivel assembly
- All self-locking hooks
- Reliable performance



Posi-hook

Tower positioning system

V2238

- With 2 $\frac{1}{4}$ in. (57 mm) swivel hook
- All self-locking hooks
- Lightweight assembly
- No chain, webbing or connection hardware

CONNECTORS FOR LANYARDS

All lanyards come standard with ¾ in. (19 mm) die-cut steel self-locking snap hook (#45000 – G) at each end.
Choose your connector in the list below by changing the last letter by the one into brackets.



45000 (G)

- Die-cut steel
- ¾ in. (19 mm) opening



44651 (V)

- Forged steel
- ¾ in. (19 mm) opening
- Swivel
- Visual fall indicator



44650 (W)

- Forged steel
- ¾ in. (19 mm) opening
- Swivel



435013 (P)

- Aluminium
- ¾ in. (19 mm) opening



43200 (A)

- Die-cut steel
- 1½ in. (41 mm) opening



43100 (U)

- Die-cut steel
- 2¼ in. (57 mm) opening



45960 (M)

- Aluminium
- 2½ in. (64 mm) opening



NEW!

P4333 (C)

- Forged steel
- ¾ in. (16 mm) opening
- Breaking strength 10,000 lbs. (45 kN)
- 5,000 lbs. (22.2 kN) gate



PM11 (C1)

- Formed steel
- ¾ in. (19 mm) opening
- Breaking strength 5,000 lbs. (22.2 kN)



NEW!

P773 (Q)

- Forged alloy steel
- 1 in. (25 mm) opening
- Breaking strength 10,000 lbs. (45 kN)



P202 (T1)

- Formed carbon steel
- 1 in. (25 mm) opening
- Breaking strength 10,000 lbs. (45 kN)



Wire Form Connector

- Stainless steel
- Rated 5,000 lbs. (22.2 kN)



P307 (T)

- Forged carbon steel
- 2 in. (50 mm) opening
- Breaking strength 9,000 lbs. (40 kN)



P407 (TT)

- Formed alloy steel
- 2½ in. (53 mm) opening
- Breaking strength 7,200 lbs. (32 kN)

V4212 (J1) (shown)

- 2½ in. (73 mm) opening

V4214 (J3)

- 5½ in. (140 mm) opening

SOFT ANCHORAGE CONNECTORS



Anchor Slings

- Pass through D-ring
- Rated 5,000 lbs. (22.2 kN)
- Made of polyester webbing
- Heavy duty back pad

V4136

- 15 in. (0.4 m) length

V4135 (shown)

- 3 ft. (0.9 m) length

V4165

- 6 ft. (1.8 m) length



Sling Choker

- Rated 5,000 lbs. (22.2 kN)
- Made of polyester webbing

V4115

- 15 in. (0.4 m) length

Anchorage Connector

The purpose of the shock absorber is to lower the impact forces caused by the fall

- Made of a 1¼-in. (45 mm) lightweight continuous web.
- Shock absorber covered with a tubular sleeve.

V41PRE

- Shock absorber



V4172



V41906

Wire Rope Slings

- 6 ft. x ¼ in. (1.8 m x 6 mm)
- Vinyl covered

V4172

- Wire rope sling

V41906

- ¾ in. (19 mm) self-locking snap hook
- O-ring



Anchor Straps

- Rated 5,000 lbs. (22.2 kN)
- Made of nylon webbing
- 3½ ft. (1.1 m)

V41803

- For structural member
- With loop

V41813 (shown)

- For structural member
- D-ring

V41823

- For rebar steel
- Protective sleeve
- Loop

V41833

- For rebar steel
- Protective sleeve
- D-ring



Endless Slings

NEW!

V41321

- 18-in. (0.5 m) endless sling

V41323 (shown)

- 3-ft. (0.9 m) endless sling

V41326

- 6-ft. (1.8 m) endless sling

HARD ANCHORAGE CONNECTORS



Beam Clamp

V5009

- Fits I-beam from 3 to 9 1/4 in. (76 to 235 mm)
- Screw-down adjustment



Beam Trolley

V5019

- Fits I-beam from 2 5/8 to 8 11/16 in. (59 to 220 mm)
- Screw-down adjustment
- Locking nut



BeamSlide

Sliding beam anchor

V5002

- Fits I-beam from 5 to 14 in. (125 to 355 mm)
- Autolocking positioning knob
- Steel rollers allow for smooth travel



Anchorage Connector

45396

- 2 1/2 in. (64 mm) opening
- Forged steel
- Attachment D-ring



Anchorage D-Rings

V4230 (shown)

- Screw type
- 1/2 in. (13 mm) N.C. 13 thread

V4232*

- Clearance hole for 1/2 in. (13 mm) bolt

V4238*

- Clearance hole for 3/4 in. (16 mm) bolt

* attachment connectors not supplied



Splice-Safe

Complies with 5,000 lbs. (22.2 kN) minimum strength rating without an eye splice.

- Provides field termination splice
- Use on 3-strand 5/8 in. (16 mm) rope
- Lightweight and reusable

V4260C1 (shown)

- With PM11 carabiner

V4260

- Without carabiner


NEW!

Ringsafe

Permanent anchor point with built-in fall indicator

V076299

- With 3/4 in. (19 mm) autolocking carabiner
- 5,000 lbs. (22.2 kN) breaking strength
- Lightweight, sleek profile
- Easy to install, inspect and maintain

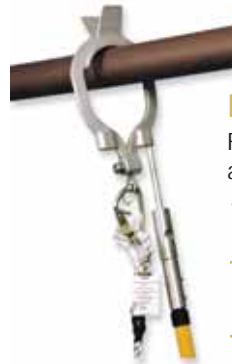

EZE-Hook

First man-up system, ideal for climbing ladders and towers.

- Available with hand grip or telescopic poles

V30A (shown)

- With pole adapter

V30U

- With universal electrical pole adapter

V1816A

- Fiberglass pole 8 to 16 ft. (2.4 to 4.9 m)

V1824A

- Fiberglass pole 8 to 24 ft. (2.4 to 7.3 m)

STOPFOR® ROPE GRABS

FEATURES

- Spring loaded cam locking system
- Gravity washer to prevent upside down installation
- Easy hinge loading anywhere on lifeline
- Stainless steel construction
- 5/8-in. (16 mm) three-strand rope diameter

Stopfor® A Advanced Trailing Rope Grabs

Features an independent triggering stop that provides a back up braking system. In the event of a fall, speed activated teeth will force the foot to engage on the rope. This new braking system also ensures that the rope grab will lock on the lifeline even if the cam lever is held beyond its non-engaged position.

WA58

- Dual braking system

WA58P

- Manual park feature

WA58R

- 2 1/8-in. (54 mm) attachment ring

Stopfor® S Trailing Rope Grab

This lightweight, anticorrosive design features an independent roller that allows the grab to travel freely on the rope. The spring loaded cam locking system insures that the grab engages during a fall.

D5812G

- 2 ft. x 1-in. (0,6 m x 25 mm) shock absorber
- 3/4-in. (19 mm) self-locking snap hook

D5862G

- 2-ft. (0,6 m) web
- 3/4-in. (19 mm) self-locking snap hook

Stopfor® M Manual Rope Adjuster

The Stopfor® M is a rope adjuster that is specially designed to protect workers from falling when working on a sloping plane, such as roofs. It can also be incorporated into a travel restraint or a work positioning system.

D5M12G

- 2 ft. x 1-in. (0,6 m x 25 mm) shock absorber
- 3/4-in. (19 mm) self-locking snap hook

D5M62G

- 2-ft. (0,6 m) web
- 3/4-in. (19 mm) self-locking snap hook



WA58



WA58P



WA58R



Stopfor® S



Stopfor® M

ROPE GRABS

Stopfor® D Kernmantle Rope Grab

Intended to be incorporated in a personal fall protection system, the Stopfor® D has also been developed with rope access applications or rescue requirements. Its unique feature is a cam lever that has two ridges for high-speed activation. When a fall occurs, the ridges give way to the pressure plate of the cam lever that brakes against the rope in a low arresting force resulting in minimum damage to the lifeline.

- Used on ½ in. (13 mm) diameter kernmantle rope
- Breech opening allows loading anywhere on lifeline
- Gravity lever prevents upside down installation
- Stainless steel construction

D1212G

- 2 ft. x 1-in. (0,6 m x 25 mm) shock absorber
- ¾-in. (19 mm) self-locking snap hook

D1262G

- 2-ft. (0,6 m) web
- ¾-in. (19 mm) self-locking snap hook



Wire Rope Grab

The wire rope grab is meant to be incorporated in a personal fall protection system where synthetic lifelines would degrade due to the chemical, abrasive or high heat conditions.

D51612G

- Gravity lever prevents upside down installation
- Used on ⅝ in. (8 mm) diameter wire rope
- 2 ft. x 1-in. (0,6 m x 25 mm) shock absorber
- ¾-in. (19 mm) self-locking snap hook
- Carabiner

NEW!



Gripgrab® Rope Grab

The Gripgrab® is a cam lever single jaw rope grab designed to move freely along a synthetic lifeline. The rope grab protects the worker while climbing up and down.

- ¾-in. (19 mm) diameter three-strand rope
- Locking pin installation system
- Quick and easy to install
- 2-in. (50 mm) attachment ring

D3412G

- 2 ft. x 1-in. (0,6 m x 25 mm) shock absorber
- ¾-in. (19 mm) self-locking snap hook

D3462G

- 2-ft. (0,6 m) web
- ¾-in. (19 mm) self-locking snap hook



LIFELINES



...N



...NG



...NE

Polyblend Lifeline

- ⅝ in. (16 mm) diameter
- Breaking strength of 6,500 lbs. (28.9 kN)

G9058

- Bulk – 600 and 1,200-ft. (180 and 365 ft.) spools

GB__N*

- Nylon thimble only

GB__NG*

- ¾ in. (19 mm) snap hook

GB__NE*

- 2½ in. (57 mm) snap hook

Superline Lifeline

- ⅝ in. (16 mm) diameter
- Breaking strength of 11,500 lbs. (51.2 kN)

G8058

- Bulk – 1,200-ft. (365 ft.) spools

GS__N*

- Nylon thimble only

GS__NG*

- ¾ in. (19 mm) snap hook

GS__NE*

- 2½ in. (57 mm) snap hook



Kernmantle Lifeline

G7058

- ⅝ in. (13 mm) diameter
- Breaking strength of 10,000 lbs. (44.5 kN)
- Bulk

* Replace “__” in part number with desired length in feet. Standard lengths: 25, 50, 100, 200, 300 and 400 ft.

FEATURES

- Sleek and durable housings
- Lightweight
- Integrated carrying handles
- Easy to handle
- ◇ Synchronized twin inertia braking pawls
- Constant triggering speed regardless of position
- Isolated spring and braking mechanism made of anti-corrosive and anti-sparking materials
- Impact indicating snap hook
- Rubber recoil bumper
- ◇ Temper proof connector assembly with included carabiner

◇ *Exclusive feature*

STANDARDS

- CSA Z259.2.2
- ANSI Z359.1
- OSHA requirement for fall protection

Part #	Length	Casing
With Galvanized Steel Wire Rope		
RT20G	20 ft. (6 m)	Polyamide 6/ABS
RT30G	30 ft. (9 m)	Polyamide 6/ABS
RT50G	50 ft. (15 m)	Polyamide 6/ABS
RT75G	75 ft. (23 m)	Cast aluminium
RT100G	100 ft. (30 m)	Cast aluminium

With Stainless Steel Wire Rope		
RT20S	20 ft. (6 m)	Polyamide 6/ABS
RT30S	30 ft. (9 m)	Polyamide 6/ABS
RT50S	50 ft. (15 m)	Polyamide 6/ABS
RT75S	75 ft. (23 m)	Cast aluminium
RT100S	100 ft. (30 m)	Cast aluminium

With Synthetic Rope		
RT30R	30 ft. (9 m)	Polyamide 6/ABS
RT50R	50 ft. (15 m)	Polyamide 6/ABS
RT100R	100 ft. (30 m)	Cast aluminium

Optional Upper Swivel Attachment		
Add "/SW" to the end of the code		



Optional Swivel

When subjected to a fall, the unit must be returned for service.



10 ft. (3 m) Self-Retracting Web Lanyard with Cover

- Autolocking carabiner
- Fall indicator fold

RN9QG (shown)

- 3/4 in. (19 mm) self-locking snap hook

RN9QW

- 3/4 in. (19 mm) swivel self-locking snap hook

RNW9QG

- Upper swivel
- 3/4 in. (19 mm) self-locking snap hook

Blocmat 250

The Blocmat 250 is a retractable load arrestor. The length of the wire rope is adjusted automatically by a tensioning and retraction system. The load arrestor Blocmat 250 has been designed to secure suspended loads. It is fitted with large handles for lifting and carrying.

Part #	Length	Capacity
RB550	50 ft. (15 m)	550 lbs. (250 kg)



Blocmat S – Suspended Type

The Blocmat S is a suspended type of material load arrestor. It is composed of an automatic fall arrest device and a rope reeling drum, both fixed on a reliable rectangular fixing plate.

Part #	Length	Wire rope	Capacity
RBS1150	50 ft. (15 m)	¼ in. (6 mm)	1,100 lbs. (500 kg)
RBS1180	80 ft. (24 m)	¼ in. (6 mm)	1,100 lbs. (500 kg)
RBS1732	32 ft. (9.7 m)	⅝ in. (8 mm)	1,700 lbs. (770 kg)
RBS1765	65 ft. (19.8 m)	⅝ in. (8 mm)	1,700 lbs. (770 kg)
RBS2225	25 ft. (7.6 m)	¾ in. (9.5 mm)	2,200 lbs. (1,000 kg)
RBS2240	40 ft. (12 m)	¾ in. (9.5 mm)	2,200 lbs. (1,000 kg)
RBS2280	80 ft. (24 m)	¾ in. (9.5 mm)	2,200 lbs. (1,000 kg)

Blocmat SI – Floor Mounted Type

The Blocmat SI has been designed to secure suspended loads. This range shall be fixed in a floor mounted position and used with an upper return sheave. It is composed of an automatic fall arrest device and a rope reeling drum, both fixed on a reliable rectangular fixing plate.

Part #	Length	Wire rope	Capacity
RBFI1150	50 ft. (15 m)	¼ in. (6 mm)	1,100 lbs. (500 kg)
RBFI1180	80 ft. (24 m)	¼ in. (6 mm)	1,100 lbs. (500 kg)
RBFI1750	50 ft. (15 m)	⅝ in. (8 mm)	1,700 lbs. (770 kg)
RBFI1780	80 ft. (24 m)	⅝ in. (8 mm)	1,700 lbs. (770 kg)
RBFI2232	32 ft. (9.7 m)	¾ in. (9.5 mm)	2,200 lbs. (1,000 kg)
RBFI2280	80 ft. (24 m)	¾ in. (9.5 mm)	2,200 lbs. (1,000 kg)



FALL PROTECTION KITS

Aerial Lift Kit

EAC06G

- Lightweight harness (AC432)
- Permanently attached 6-ft. (1.8 m) shock-absorbing lanyard (C006G)
- Storage bag (XB1116)
- Also available in 4-ft. (1.2 m) model



AC432 & C006G



XB1116

Basic Fall Protection Kit

KITC-B71

- Versafit harness (AC732)
- 6-ft. (1.8 m) shock-absorbing lanyard (C1106G)
- Storage bag (XB1116)



AC732



C1106G



XB1116

NEW!

Scaffolding/Forming Kit

KITC-B72

- Scaffold harness (AC732/D)
- 6-ft. (1.8 m) shock-absorbing lanyard (C226U)
- Storage bag (XB1116)



AC732/D



C226U



XB1116

100% Tie Off Kit

KITC-B73

- Versafit harness (AC732)
- 6-ft. (1.8 m) shock-absorbing lanyard (C1126G)
- Storage bag (XB1116)



AC732



C1126G



XB1116

Rebar Kit

KITC-BE1

- Construction harness (EBB95L)
- Rebar chain assembly (V61WE)
- Storage bag (XB1116)



EBB95L



V61WE



XB1116

NEW!

Welder's Kits

KIT-BK1 (shown)

- Kevlar harness (ACK03)
- 6-ft. (1.8 m) Kevlar shock-absorbing lanyard (COK6G)
- Storage bag (XB1116)



ACK03



COK6G



XB1116

KIT-BK2

- Kevlar harness (ACK03)
- 6-ft. (1.8 m) wire rope shock-absorbing lanyard (CK906G)
- Storage bag (XB1116)

NEW!

Quick Donning Vest Kit

KITC-BV1

- Versafit harness (AC732)
- Tracvest (XVEST01)
- Storage bag (XB1116)



AC732



XVEST01



XB1116

QUIK-MOUNT® ROOFERS KITS

The Quik-Mount® roofing systems are designed to provide fall protection to workers on wooden roof structures. Lightweight and easy to install, the Quik-Mount® kits offer a safe, temporary anchorage system that complies with ANSI and OSHA regulations.

Quik-Mount® Roofing System

- Versafit harness (AC732)
- Available with 25-ft. or 50-ft. (7.6 or 15 m) lifelines
- Stopfor® S rope grab and 2-ft. (0.6 m) shock-absorbing lanyard combination (D5812G)
- Pack of anchoring screws
- Instructions manual
- Supplied in a carrying pail

N0325S

- One reusable roofing anchor
- 25-ft. (7.6 m) system

N0335S

- One reusable roofing anchor
- 35-ft. (10.6 m) system

N0350S

- One reusable roofing anchor
- 50-ft. (15 m) system

N0725S (shown)

- Heavy-duty hinged D-ring roof anchor (428103S)
- 25-ft. (7.6 m) system

N0735S

- Heavy-duty hinged D-ring roof anchor (428103S)
- 35-ft. (10.6 m) system

N0750S

- Heavy-duty hinged D-ring roof anchor (428103S)
- 50-ft. (15 m) system



Reusable Roofing Anchor

N105B

- Box of five anchors
- With screws



Heavy-Duty Hinged D-ring Roof Anchor

428103S

- With screws



ASCENT/DESCENT SYSTEMS

Designed for controlled descent, work access and rescue for general industry, maintenance and confined space applications.

FEATURES

- Manually operated, raising and lowering
- Requires 10 lbs. (4.5 kg) of force to hold a 220 lbs. (100 kg) load
- 4:1 mechanical advantage
- ◇ Anti-reversing lock, activates in descent mode
- Positioning ascender
- $\frac{7}{16}$ in. (11 mm) diameter kernmantle rope
- Optional $\frac{1}{2}$ in. (13 mm) diameter kernmantle rope available

◇ Exclusive feature

K50S25

- 25-ft. (7.6 m) system

K50S50

- 50-ft. (15 m) system

K50S75

- 75-ft. (23 m) system

K50S100

- 100-ft. (30 m) system



DEROPE SYSTEMS

Designed for controlled vertical and angled descent and emergency rescue for tower, oil field and power platform applications.

FEATURES

- Easy to use, requires minimum training
- Automatically controls rate of descent
- Descent speed of 138 ft./min. (42 m/min.)
- ◇ Capable of multi-person rescues
- Up to 1,300 ft. (400 m) of descent for one person
- ◇ Up to 330 ft. (100 m) of descent for two persons
- ◇ Available with hand crank winch for limited lifting
- All Derope kits include:
 - 3-ft. (0.9 m) anchor sling (V4135)
 - Autolocking carabiner (P307)
 - J-knife
 - Rescue/storage bag

◇ Exclusive feature

K7__/TK*

- Derope for one or two persons

K7__/AK*

- Derope with hand wheel winch

K7__/KTK*

- Derope for one person



K7__/TK



K7__/AK



K7__/KTK

* Replace “__” in part number with desired length in feet. Standard lengths: 100, 150, 200, 300, 400, 500 and 600 ft., depending on model.

TOWER CLIMBER'S SYSTEMS

CLIMBING AND WORK POSITIONING



Basic System

KITC-TCB

- Tower harness (FBBL)
- Tie-back lanyard (C126UZ)
- Work positioning lanyard (CSP1560)
- Petzl helmet
- Gear storage bag

Deluxe System

KITC-TCB

- Tower harness (FBBL)
- Saddle for harness (XSAD1)
- Tie-back lanyard (C126UZ)
- Work positioning lanyard (CSP1560)
- Stopfor® S rope grab with 2-ft. lanyard combination (D5812G)
- Wire rope grab with carabiner (LT516)
- Petzl helmet
- Gear storage bag



ACCESSORIES



Bags

XB23144

- Medium

XB26168

- Large



NEW!

Victim Transfer Pulley

K9TRPS

- Two carabiners
- Bag

XB2410

- Bag for victim transfer pulley



Rescue Cradle

K5HT9

- For one person

NEW!

Suspension Loop

K6FL6

- Suspension loop



CONFINED SPACE SYSTEMS

Accessing confined spaces involves a number of life-threatening hazards. These may include the possibility of a fall or the occurrence of being overcome by fumes or gases. Tractel's confined space access and rescue systems are designed to provide a safe means of accessing a confined space area. In an emergency, confined space systems allow the rescuers to retrieve the injured or unconscious workers without exposing themselves to similar potential hazards.

Standard Confined Space Systems

Part #	Description	Tripod	Bi-directional retrieval		Winch		Retractable lifeline	
		T3S7	T1T50G	T1T100G	T2S50G	T2S100G	RT50G	RT100G
T51F50G	Confined Space System One – 50 ft. (15 m)	x	x					
T51F100G	Confined Space System One – 100 ft. (30 m)	x		x				
T52F50G	Confined Space System Two – 50 ft. (15 m)	x	x		x			
T52F100G	Confined Space System Two – 100 ft. (30 m)	x		x		x		
T53F50G	Confined Space System Three – 50 ft. (15 m)	x			x		x	
T53F100G	Confined Space System Three – 100 ft. (30 m)	x				x		x

All the above systems include required head pulleys, mounting brackets and carrying bags.



T52F50G



T51T50G

Tracode Rescue Confined Space Systems

Two persons capacity with sheaves above tripod head to give more clearance under the tripod for secure operation.

Part #	Description	Tripod		Bi-directional retrieval		Winch	
		T3I10	T3I102	T1T50G	T1T100G	T2T50G	T2T100G
T51T50G	Confined Space System One – 50 ft. (15 m)	x		x			
T51T100G	Confined Space System One – 100 ft. (30 m)	x			x		
T52T50G	Confined Space System Two – 50 ft. (15 m)		x	x		x	
T52T100G	Confined Space System Two – 100 ft. (30 m)		x		x		x

All the above systems include required mounting brackets and carrying bags.

Motorized Confined Space System

- Electrically powered or pneumatic lifting and lowering with the approved Tirak® hoist
- Can be controlled from the top by an operator well away from the danger
- In case of a main power failure, there is a manually operated handle with integrated brake to lift the work seat back to the top

Note: must be used with independent fall protection equipment



CONFINED SPACE SYSTEMS

Standard Tripod

- Telescopic aluminium tripod
- Minimum breaking strength of 5,000 lbs. (22.2 kN)
- Two forged steel anchor eyes

T3F7 (shown)

- 7-ft. (2.1 m) tripod

T3F9

- 9-ft. (2.7 m) tripod



Tracpode Rescue Tripod

- 8-ft. (2.4 m) adjustable aluminium tripod
- Min. breaking strength of 10,000 lbs. (44.4 kN)
- Steel head pulley
- Anchor eye
- Non-slip feet for indoor surfaces

T3110

- With single head pulley

T31102 (shown)

- With two head pulley



Steel Head Pulley

- Easy to install
- Pulley with sealed ball bearing
- Pulley is supplied with carabiner

T90P2

- Steel head pulley with carabiner



Leg Mounting Bracket

T90B4

- For Blocfor® retrieval lifeline

Work Winch

- Galvanized steel wire rope lengths of 50, 100 or 200 ft. (15, 30 or 60 m)
- Tripod mounting bracket included

T2S50G


- 50 ft. (15 m) work winch

T2S100G

- 100 ft. (30 m) work winch

T2S200G

- 200 ft. (60 m) work winch



Blocfor® Bi-Directional Retrieval Lifeline

While the retracting capability of the unit provides freedom of movement and fall protection, the device can be easily converted to a recovery device to rescue injured or unconscious worker.

Part #	Length	Wire rope	Casing
T1T50G	50 ft. (15 m)	Galvanized steel	Polyamide 6/ABS
T1T100G	100 ft. (30 m)	Galvanized steel	Cast aluminium
T1T50S	50 ft. (15 m)	Stainless steel	Polyamide 6/ABS
T1T100S	100 ft. (30 m)	Stainless steel	Cast aluminium



Work winch must be used with a backup fall arrest system.

Spreader Bar

T9YL2

- Web 2 ft. (0.6 m)



Bosun's Chair

Q207B

- 12 x 24 in. (0.3 x 0.6 m) seat
- Integrated belt*

* standard is medium, specify for other size.



Carrying Bag for Tripod

XB15105

- For up to 10 ft. (3 m) tripod
- 105 x 15 x 15 in. (267 x 38 x 38 cm)



TIRSAFE™

TEMPORARY HORIZONTAL LIFELINE SYSTEM

FEATURES

- ◇ Built-in tension indicator
- Impact indicator
- ◇ Re-settable by authorized service center
- ◇ Three users per single span
- Single spans up to 65 ft. (20 m)
- ◇ Multi spans up to 300 ft. (90 m)
- ◇ Minimal line deflection
- Lightweight and quick installation
- Sold separately or as complete system

◇ Exclusive feature

Part #	Description
Tirsafe® Unit	
H088159	Tirsafe® unit only
System with Turnbuckle	
H365001	65-ft. (20 m) system
H310001	100-ft. (30 m) system
System with T3 Tirfor®	
H41001	100-ft. (30 m) system
H41501	150-ft. (45 m) system
H42001	200-ft. (60 m) system
H42501	250-ft. (75 m) system
H43001	300-ft. (90 m) system

The Tirsafe™ device adds new energy absorbing technology to any Horizontal Lifeline System (HLL). With the unit's unique features, it allows for quicker and more reliable installations while at the same time provides the industries **first** fully reusable HLL Energy Absorber.

The system is designed to accommodate up to three workers to travel along a 65 ft. (20 m) single span or up to 300 ft. (90 m) multi spans and reduces line deflection to approximately seven feet.

Upon impact force, the Tirsafe™ device is simply sent back to an authorized service center, similar to Self Retracting Lifelines, for repairs and re-certification. The Tirsafe™ HLL Energy Absorber is simply the easiest, most reliable and cost effective system on the market today.




"Federal, state and provincial regulations require that horizontal lifelines are to be designed, installed and used under the supervision of a qualified person, and as part of a complete fall arrest system which maintains a safety factor of at least two."

Refer to CSA Z259.13-04 and OSHA 1926.502 (d) (8)



Tirsafe™

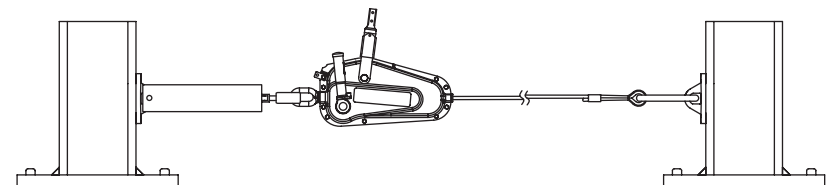

T3 Tirfor®

The T3 Tirfor® unit is a continuous locking jaw tensioning device. Used along with the Tirsafe™ Horizontal Lifeline System, it provides a fast and easy method for tensioning any horizontal lifeline. The unit is sold separately or as part of a complete Tirsafe™ system and makes installing and moving horizontal system quick and effortless.



Tension indicator



Impact indicator

FALLPROTEC

TEMPORARY HORIZONTAL WIRE ROPE LIFELINE

Tractel's horizontal wire rope lifeline system is a low-stretch, single line system. Suspended between two approved anchorage points, the system provides worker fall protection during horizontal movement. Strong, lightweight and quick to install, the system utilizes very few parts to increase safety and ease installation. The lifeline tension and adjustment is performed using a turnbuckle tensioner. The shock-absorbing device included in the system contributes to reduce substantially the maximum impact load on the anchorage points, thus reducing damage to the system.

- Shock-absorbing device
- $\frac{3}{8}$ -in. (9.5 mm) wire rope lifeline
- Jaw/jaw turnbuckle tensioner
- Two autolocking carabiners
- Two travel forged O-rings

H23001

- 30-ft. (9 m) system


H26001

- 60-ft. (18 m) system



NEW! TRAVSAFE® TEMPO

TEMPORARY HORIZONTAL WEB LIFELINE

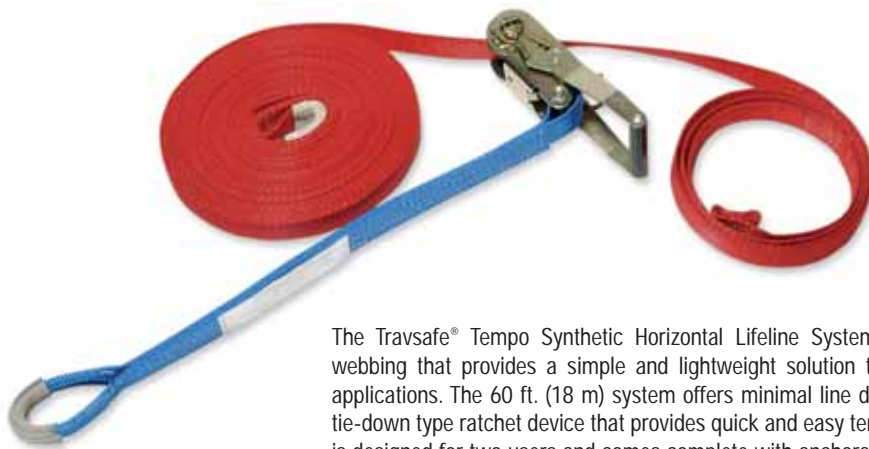

The Travsaf® Tempo Synthetic Horizontal Lifeline System utilizes a low-stretch polyester webbing that provides a simple and lightweight solution to temporary horizontal fall arrest applications. The 60 ft. (18 m) system offers minimal line deflection and utilizes a heavy duty tie-down type ratchet device that provides quick and easy tensioning to the system. The system is designed for two users and comes complete with anchorage straps, auto locking carabiners, traveling O-rings and storage bag.

H636768

- Two anchor slings (V4165)
- Two carabiners (PM11)
- Two travel O-rings (47700)
- Storage bag



47700



PM11



V4165

TRAVSAFE®


PERMANENT HORIZONTAL LIFELINE SYSTEM

FEATURES

- Unlimited system length
- Up to seven workers per system
- Intermediate anchors every 50 ft. (15 m)
- Ease and smoothness of travel over anchors
- Overhead systems using self-retracting lifelines can be up to 50 ft. (15 m) above the work area. Higher if you use lifelines and rope grabs.

APPLICATIONS

- Roof tops without guardrails or high parapets
- Aircraft hangers to allow airplane service
- Bridges and viaducts
- Overhead cranes
- Catwalks without sides
- Arena rafters

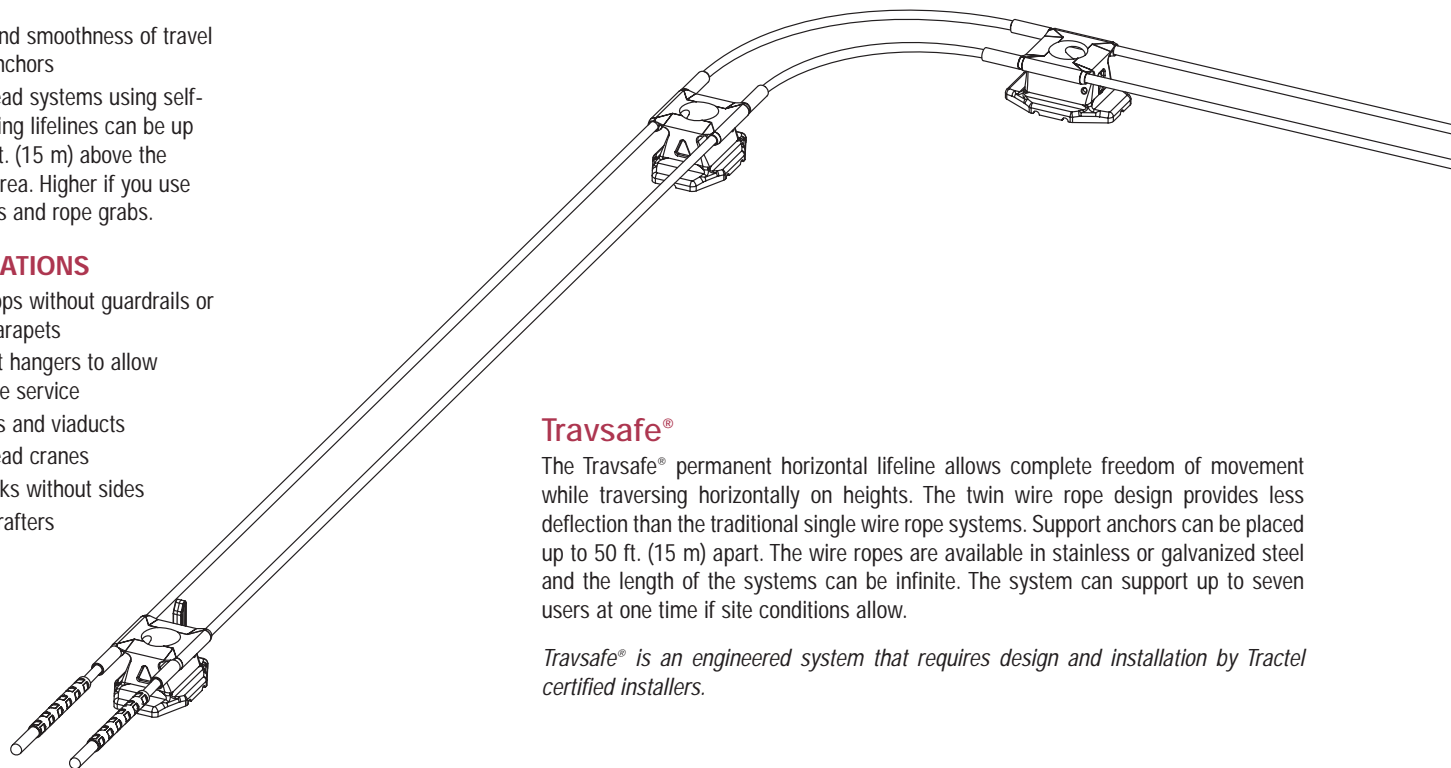

Travsafe®

The Travsafe® permanent horizontal lifeline allows complete freedom of movement while traversing horizontally on heights. The twin wire rope design provides less deflection than the traditional single wire rope systems. Support anchors can be placed up to 50 ft. (15 m) apart. The wire ropes are available in stainless or galvanized steel and the length of the systems can be infinite. The system can support up to seven users at one time if site conditions allow.

Travsafe® is an engineered system that requires design and installation by Tractel certified installers.



Travellers

The travellers have minimal moving parts and are made out of stainless steel. They move effortlessly over the anchors and around corners. The Regular traveller fits onto the system at the end anchors, the Removable traveller can be installed at any point along the system. The Rollsafe traveller is used in overhead applications.



Regular



Removable



Rollsafe

NEW!

Travflex®

The Travflex® Horizontal Lifeline is an evolution from the Travsafes® HLL.

The Travflex® is a stainless steel anchor specially designed to reduce the forces which develop at all points on a lifeline. The Travflex® anchor can be attached on the metal structure with 12 self-tapping screws. It is supplied with a gasket to ensure a watertight installation.

When there is a fall, the Travflex® post will bend and absorb the energy generated by the line by the deformation of two dissipators integrated in its joint fixed on the anchor plate.

The Travflex® is designed to support three people. It is installed with a maximum distance of 50 ft. (15 m) between anchors. The maximum forces at the end anchors in the event of a fall are 3,650 lbs. (16.2 kN).

Travflex® is an engineered system that requires design and installation by Tractel certified installers.



Stainless steel
end anchor



Aluminium
end anchor



Travflex®
end anchor



Stainless steel
intermediate anchor



Aluminium
intermediate anchor



Travflex®
intermediate anchor

LADDER SAFETY SYSTEMS



FEATURES

- Integrated shock absorber in upper bracket reducing efforts on ladder
- Adjustable on most permanent ladders
- No special tools required for installation
- System available for ladders extended above platform
- Includes:
 - Wire rope
 - Wire rope adjuster
 - Upper bracket with integrated shock absorber
 - Lower bracket

Wire rope	5/16 in. (8 mm)	3/8 in. (9,5 mm)
Standard system*		
with detachable traveller	LT516	LN38
20 ft. (6 m)	L1T20	L1N820
200 ft. (60 m)	L1T200	L1N8200
Extended system*		
with detachable traveller	LN516	LN38
20 ft. (6 m)	L1NE20	L1NE820
200 ft. (60 m)	L1NE200	L1NE8200

* other lengths available from 20 to 200 ft. (6 to 60 m) by multiple of 10 ft. (3 m).
n.b. system does not include ladder.

TIEBACK ANCHORS



U-Bar

The standard U-bar safety tieback anchors are the economical solution for securing safety lifelines or equipment lines for fall protection and suspended work.

Wall Mounted

When tiebacks are required on roofs where waterproofing or flashing is not an option, Tractel's wall mounted U-bar tieback anchors provide a simple, inexpensive solution.



Tiebacks form a system that must be engineered and designed.

PART NUMBER / PAGE NUMBER

Part #	Page	Part #	Page	Part #	Page	Part #	Page	Part #	Page	Part #	Page
4281035	25	BD942	10	C706A	14	K50S50	26	RBS1150	23	V1824A	19
43100	17	BD952	10	C706G	14	K50S75	26	RBS1180	23	V2238	16
43200	17	C002RG	13	C706U	14	K5HT9	27	RBS1732	23	V30A	19
435013	17	C0K6G	15	C726A	14	K6FL6	27	RBS1765	23	V30U	19
44650	17	C106A	11	C726G	14	K7_/AK	26	RBS2225	23	V4115	18
44651	17	C106C	11	C726U	14	K7_/KTK	26	RBS2240	23	V41321	18
45000	17	C106G	11	C806A	13	K7_/TK	26	RBS2280	23	V41323	18
45396	19	C106GZ	11	C806G	13	K9TRPS	27	RN9QG	22	V41326	18
45960	17	C106U	11	C806U	13	KIT-BK1	24	RN9QW	22	V4135	18
AC032	6	C1106A	11	C906G	15	KIT-BK2	24	RNW9QG	22	V4136	18
AC042	6	C1106G	11	CK906G	15	KITC-B71	24	RT100G	22	V4165	18
AC100L	9	C1106U	11	CSP1560	16	KITC-B72	24	RT100R	22	V4172	18
AC1050L	9	C1126A	11	D1212G	21	KITC-B73	24	RT100S	22	V41803	18
AC132L	9	C1126G	11	D1262G	21	KITC-BE1	24	RT20G	22	V41813	18
AC3316	5	C1126U	11	D3412G	21	KITC-BV1	24	RT20S	22	V41823	18
AC532	7	C126A	12	D3462G	21	KITC-TCB	27	RT30G	22	V41833	18
AC542	7	C126C	12	D51612G	21	KITC-TCD	27	RT30R	22	V41906	18
AC7122	4	C126G	12	D5812G	20	L1N820	34	RT30S	22	V41PRE	18
AC722	5	C126GZ	12	D5862G	20	L1N8200	34	RT50G	22	V4212	17
AC7315	4	C126U	12	D5M12G	20	L1NE20	34	RT50R	22	V4214	17
AC732	4	C126UZ	12	D5M62G	20	L1NE200	34	RT50S	22	V4230	19
AC732/D	5	C186G	12	EAC06G	24	L1NE820	34	RT75G	22	V4232	19
AC742	4	C186GZ	12	EBB93L	6	L1NE8200	34	RT75S	22	V4238	19
AC752	4	C186UZ	12	EBB95L	6	L1T20	34	T1T100G	29	V4260C1	19
AC762	5	C196G	11	EHBO2RL	8	L1T200	34	T1T100S	29	V5002	19
AC772	4	C196GZ	11	EHBF02RL	8	LN38	34	T1T50G	29	V5009	19
ACK03	7	C206A	13	FBBL	8	LN516	34	T1T50S	29	V5019	19
ACK04	7	C206G	13	G7058	21	LT516	34	T2S100G	29	V61WE	16
AD032	6	C206U	13	G8058	21	N0325S	25	T2S200G	29	WA58	20
AD042	6	C226A	13	G9058	21	N0335S	25	T2S50G	29	WA58P	20
AD3316	5	C226G	13	GB_N	21	N0350S	25	T3F7	29	WA58R	20
AD532	7	C226PM	13	GB_NE	21	N0725S	25	T3F9	29	XB1116	10
AD542	7	C226U	13	GB_NG	21	N0735S	25	T3I10	29	XB11163	10
AD7122	4	C306G	15	GS_NE	21	N0750S	25	T3I102	29	XB15105	29
AD722	5	C326G	15	GS_N	21	N105B	25	T51F100G	28	XB23144	27
AD7315	4	C406A	16	GS_NG	21	P202	17	T51F50G	28	XB2410	27
AD732	4	C406G	16	H088159	30	P307	17	T51T100G	28	XB26168	27
AD732/D	5	C406U	16	H23001	31	P407	17	T51T50G	28	XCTW01	10
AD742	4	C496G	16	H26001	31	P4333	17	T52F100G	28	XCTW02	10
AD752	4	C506A	14	H310001	30	P773	17	T52F50G	28	XSAD1	8, 9
AD762	5	C506G	14	H365001	30	PM11	17	T52T100G	28	XSPAD	10
AD772	4	C506U	14	H41001	30	Q207B	29	T52T50G	28	XVEST02	10
BD032	10	C526A	14	H41501	30	RB550	23	T53F100G	28	XW2R	10
BD042	10	C526G	14	H42001	30	RBF1150	23	T53F50G	28		
BD052	10	C526U	14	H42501	30	RBF1180	23	T90B4	29		
BD832	10	C606A	16	H43001	30	RBF1750	23	T90P2	29		
BD842	10	C606G	16	H636768	31	RBF1780	23	T9YL2	29		
BD852	10	C606U	16	K50S100	26	RBF2232	23	V076299	19		
BD932	10	C696G	16	K50S25	26	RBF2280	23	V1816A	19		

TRACTEL WORLDWIDE...



In Canada

11020 Mirabeau
Montreal, Quebec H1J 2S3

1615, Warden Ave.
Scarborough, Ontario M1R 2T3



1 800 561-3229

Local: (514) 493-3332 • Fax: (514) 493-3342 • fallstop@tractel.com • www.tractel.com

P4525C - 1500 - 05/05 © 2005 Tractel. All rights reserved. Fallstop is a registered trademark of Tractel. Printed in Canada.

In the United States

110 Shamut Rd., P.O. Box 188
Canton, MA 02021

315, Cloverleaf Dr., Build. E
Baldwin Park, CA 91706



CANADA